

Technical specifications

Fresh Master

R32

Full
DC
inverterSCOP
5.1


A+++ / A+++




RCH-RTY3
Remote controller



Fresh Air

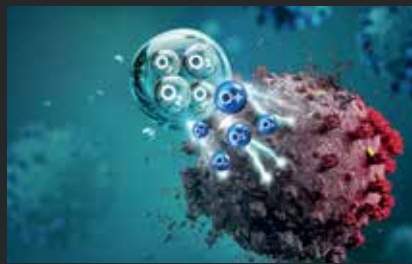

HI-NANO sterilization

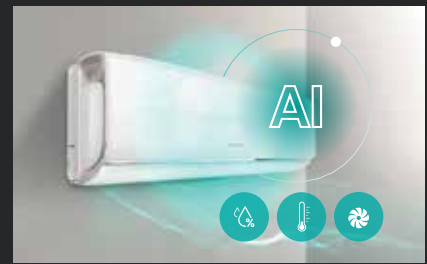

AI smart



HI-NANO
Sterilization



4-in-1 filter &
active carbon
filter



Dual Self clean
(indoor/outdoor)



Fresh Air



Air quality
monitoring



Air quality
LED display



Anti-bacteria Fin



Anti-mold



AI Smart



WiFi Control



Voice Control



Ceiling airflow
Floor airflow



Comfortable
Sleep Four Modes



Dimmer



Humidity Control



Light-sensitive



Multi Dimensional
airflow



Timer 24 h



18 dB



8 °C Heating



Heating at -22 °C



Child Lock



Full DC Inverter



Self-diagnosis



Outdoor Unit
Chasis Heater



High Energy
Efficiency



Economy mode
operation



Power statistic
display

Model		QF25XW0E	QF35XW0E
Model name	Indoor Unit	QF25XW0EG	QF35XW0EG
	Outdoor Unit	QF25XW0EW	QF35XW0EW
Model code	Indoor Unit	20004044	20004011
	Outdoor Unit	20006228	20004012
Cooling Capacity	W	2600 (1000-4000)	3500 (1000-4400)
Rated Input-Cooling	W	535 (180-1050)	810 (180-900)
Rated Current Cooling	A	2.4	3.6
Heating Capacity	W	3200 (1600-4200)	4200 (1600-4800)
Rated Input-Heating	W	720 (300-1250)	1040 (300-1280)
Rated Current Heating	A	3.2	4.6
Voltage, Frequency, Phase	V - Hz - Ph	220-240V ~ 50Hz, 1P	220-240V ~ 50Hz, 1P
SEER	Cooling	8.8	8.5
SCOP	Heatling Average	5.1	5.1
SCOP	Heatling Warmer	6.0	5.6
Energy Class	Cooling	A+++	A+++
Energy Class	Heating	A+++	A+++
Moisture Removal	L/hour	0.9	1.2
Air flow			
Air Circulation (H/HM/M/ML/L)	m ³ /h	580/550/500/450/400/350	630/610/560/510/460/410
Noise power/pressure			
Indoor Unit Noise Level - Sound Power	dB (A)	53	54
Indoor Unit Noise Level - Sound Pressure (H/HM/M/ML/L/Quiet)	dB (A)	37/35/33/30/28/26	37/35/33/30/28/26
Outdoor Unit Noise Level - Sound Power	dB (A)	60	62
Outdoor Unit Noise Level - Sound Pressure	dB (A)	50	50
Refrigerant			
Refrigerant	/	R32	R32
Refrigerant charge volume	g	860	860
Connecting Pipe Diameter			
Liquid Pipe	inch (mm)	1/4 (6.35)	1/4 (6.35)
Gas Pipe	inch (mm)	3/8 (9.52)	3/8 (9.52)
Max length of pipe	m	20	20
Max height difference	m	10	10
Dimensions			
Net Dimensions - Indoor Unit	mm (WxHxD)	978×313×217	978×313×217
Net Dimensions - Outdoor Unit	mm (WxHxD)	810×585×280	810×585×280
Net Weight - Indoor Unit	kg	13,5	13,5
Net Weight - Outdoor Unit	kg	33	33
Packing Dimensions - Indoor Unit	mm (WxHxD)	1060×430×400	1060×430×400
Packing Dimensions - Outdoor Unit	mm (WxHxD)	940×630×385	940×630×385
Gross Weight - Indoor Unit	kg	18.5	18.5
Gross Weight - Outdoor Unit	kg	37	37
Loading Capacity (20'/40'/40'HC)	sets	70/142/162	70/142/162
Operating temperature			
Operating Temp Range	Cooling (°C)	-15 °C - 50 °C	-15 °C - 50 °C
	Heating (°C)	-22 °C - 24 °C	-22 °C - 24 °C
Useful area			
Max. useful area*	m ²	14	24

* Usable area depends on the building insulation and potential heat sources in the building.